

DISTRICT NIRMITHI KENDRA, CIVIL STATION, MALAPPURAM.

Ph : 0483- 2735594

INVITATION OF LIMITED TENDER-PERCENTAGE CONTRACT

DATE : 4-12-2025

Tender No : NKMP/TNDR/PRCNT/P1/35/2025-A2

Project Name :	MINOR REPAIR WORKS FOR PRE METRIC HOSTEL AT MANIMOOLI	
Location :	MANIMOOLI	TALUK :NILAMBUR
Scope of work:	Civil works, etc	

Sealed tenders are invited from from **experienced and competent bidders**, meeting prescribed qualifying criteria as mentioned in **tender document/Schedule**. Tender form and Tender schedule can be downloaded from Malappuram District Administration website **www.malappuram.nic.in** to understand the scope of work & condition of tender document. DNKM reserves the right to issue any corrigendum to the tender even upto five days prior to the due date of opening of the tender. Bidders are also advised to check the website for the purpose of submitting their bids or revising their bids, whether any such corrigendum to the tender has been issued or not.

The BIDDERS should have GST REGISTRATION.

Tenders should be addressed to , **Project Manager cum Exe.secretary, District Nirmithi Kendra, Civil Station, Malappuram, 676505, phone : 0483-2735594**. Sealed Tenders are accepted through By hand/ Registered post/ Couriers. Late tenders will not be accepted. Tenders will be opened in the presence of Tendered or their authorized representatives who may be present at that time. If the Tender date happens to be a declared holiday, the tender process will be done on the next working day at same time and place. Further details can be had from the office of District Nirmithi Kendra, Civil Station, Malappuram during working hours.

INSTRUCTIONS TO BIDDERS

1	Last Date & Time of Submission of Bids *	12-12-2025, 11:00 AM
2	Date & Time of Opening of Bids	: 12-12-2025, 3.00 PM
3	Cost of Tender form	NIL
4	Tender Value	Rs : 287848/-
5	EMD	: NIL
6	Category of Contractor	: C class and Above
7	Period of completion	: 2 Months
8	Bid Validity	: 60 Days

Name :

Address of firm :

Signature :

Project manager cum Exe.secretary

District Nirmithi Kendra, Malappuram.

Signature :


Project Manager cum
Executive Secretary
District Nirmithi Kendra
Civil Station, Malappuram



LIMITED TENDER SCHEDULE - ANNEXURE-1**(FORMAT FOR QUOTING PERCENTAGE ITEM RATE CONTRACT)****Tender No : NKMP/TNDR/PRCNT/P1/35/2025-A2****DATE-4/12/2025****Work Name :MINOR REPAIR WORKS FOR PRE METRIC HOSTEL AT MANIMOOLI**

Sl. No.	Item Description	Quantity	Units	Estimated Rate	TOTAL AMOUNT Without Taxes
1	2	4.000	5	6	53
1	1- KITCHEN GRILL				
1.001	15.12.1 Dismantling doors, windows and clerestory windows (steel or wood) shutter including chowkhats, architrave, holdfasts etc. complete and stacking within 50 metres lead:Of area 3 sq. metres and below	1.000	each	325.9000	325.90
1.002	9.48.2 Providing and fixing M.S. Grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete.Fixed to openings/ wooden frames with rawl plugs screws etc	74.895	KG	212.8500	15941.40
1.003	13.61.1 Painting with synthetic enamel paint of approved brand and manufacture to give an even shade:Two or more coats on new work	5.000	sqm	141.5400	707.70
2	WINDOW GLASS REPLACE AND WINDOWS PAINTING				16975.00
2.001	15.12.1 Dismantling doors, windows and clerestory windows (steel or wood) shutter including chowkhats, architrave, holdfasts etc. complete and stacking within 50 metres lead:Of area 3 sq. metres and below	27.000	EACH	325.9000	8799.30



2.002	9.48.2 Providing and fixing M.S. Grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete. Fixed to openings/ wooden frames with rawl plugs screws etc	700.738	KG	212.8500	149152.08
2.003	13.50.3 Applying priming coat: With ready mixed red oxide zinc chromate primer of approved brand and manufacture on steel galvanised iron /steel works	93.690	sqm	59.7600	5598.91
2.004	15.14.1 Dismantling wood work in frames, trusses, purlins and rafters up to 10 metres span and 5 metres height including stacking the material within 50 metres lead: Of sectional area 40 square centimetres and above	0.052	CUM	3956.3700	205.73
2.005	50.9.1.2 Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position with hold fast lugs or with dash fasteners of required dia & length (hold fast lugs or dash fastener shall be paid for separately) using good quality Pincoda wood	0.064	CUM	113926.0000	7291.26
2.006	13.61.1 Painting with synthetic enamel paint of approved brand and manufacture to give an even shade: Two or more coats on new work	93.690	sqm	141.5400	13260.88
2.007	9.55.2 Providing and fixing ISI marked IS : 1341 M.S. pressed butt hinges bright finished with necessary screws etc. complete : 100x58x1.90mm.	4.000	NO	42.0300	168.12
2.008	9.63.1 Providing and fixing ISI marked oxidised M.S. tower bolt black finish, (Barrel type) with necessary screws etc. complete : (Copper oxidized as per IS : 1378) 250x10 mm	2.000	NO	80.4000	160.80
3	REPAIR WORK FOR SANITATION				184637.08

3.001	50.18.9.19.1 Providing and fixing PVC pipes including fixing the pipe with clamps/ clips/ at 1.00 m spacing . This includes jointing of pipes with one step PVC solvent cement and testing of joints complete as per direction of Engineer-in-Charge 110 mm dia 6 Kgf/cm2 - External work- Exposed on wall	30.000	M	367.1400	11014.20
3.002	50.18.9.9.1 Providing and fixing PVC pipes includings jointing of pipes with one step PVC solvent cement, trenching, refilling & testing of Joints complete as per direction of engineer in charge.110 mm dia 6Kgf/cm2	18.000	M	521.1300	9380.34
4	SETTING UP OF GAS STORAGE ROOM AT THE OUT SIDE OF KITCHEN				20394.54
4.001	15.2.1 Demolishing cement concrete manually / by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in-Charge.Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix)	0.270	cum	2161.0800	583.49
4.002	4.1.3 Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:2:4 (cement : 2 coarse sand (zone-III)derived from natural sources : 4 graded stone aggregate 20 mm nominal size derived from natural sources)	0.540	cum	7930.1400	4282.28
4.003	4.3.1 Centering and shuttering including strutting, propping etc. and removal of form work for:Foundations, footings, bases for columns	1.140	sqm	331.5500	377.97
4.004	50.10.2 Steel work for purlin/single section with G I pipes including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete	51.831	KG	160.6100	8324.58

4.005	12.50 Providing and fixing precoated galvanised iron profile sheets (size, shape and pitch of corrugation as approved by Engineer-in-charge) 0.50 mm (+0.05%), total coated thickness with zinc coating 120 grams per sqm as per IS: 277, in 240 mpa steel grade, 5-7 microns epoxy primer on both side of the sheet and polyester top coat 15-18 microns. Sheet should have protective guard film of 25 microns minimum to avoid scratches during transportation and should be supplied in single length upto 12 metre or as desired by Engineer-in-charge. The sheet shall be fixed using self drilling/self tapping screws of size (5.5x55mm) with EPDM seal, complete upto any pitch in horizontal/ vertical or curved surfaces, excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required.	5.250	sqm	723.0800	3796.17
4.006	10.25.2 Item Shifted to Sub head 14 as item 14.73 Item Shifted to head 14 as item 14.74 Steel work welded in built up sections/framed work, including cutting, fabrication	127.395	KG	153.2100	19518.19
4.007	13.61.1 Painting with synthetic enamel paint of approved brand and manufacture to give an even shade:Two or more coats on new work	12.000	sqm	141.5400	1698.48
4.008	11.39 Providing and laying rectified Glazed Ceramic floor tiles of size 300x300 mm or more (thickness to be specified by the manufacturer), of 1st quality conforming to IS: 15622, of approved make in colours White, Ivory, Grey, fume Red Brown, laid on 20	2.880	SQM	1230.4900	3543.81
5	TANK CLEANING				42124.97

001	OD84018/2024-2025 Engaging man mazdoor for DLR basis for cleaning purpose as per the direction of Engineer in charge.	4.00	Day	929.17	3716.68
6	Electrification				20000.00
					23716.68
	TOTAL				287848.27

Quote in Below rate

..... % BELOW

Quoted rate in Rs :

In words : Rupees


NOTE :1. Also KCWWF, TDS, and other Statutory Taxes are applicable/levied as per the norms of Tax
Name :

Address of firm :

Signature :

Signature :

(Signature)
04.12.25
Project Manager cum
Executive Secretary
District Nirmithi Kendra
Civil Station, Malappuram

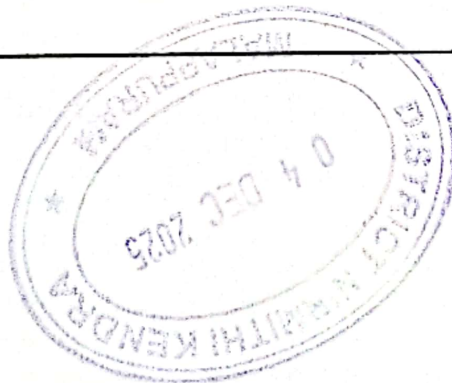

TENDER DOCUMENT

DISTRICT NIRMITHI KENDRA, CIVIL STATION, MALAPPURAM

GENERAL CONDITIONS

1. The Bidder should quote all the items of prescribed schedule; partially quoted tenders will be rejected.
2. All works shall be done in conformity with the specifications and conditions of contract in force in the District Nirmithi Kendra, Malappuram. The rate should be quoted in the attached schedule, **KCWWF, TDS, GST and other taxes are applicable / levied** from the each running bill.
3. The Bidder shall examine closely carefully study the drawings and additional specifications and all the documents, which form part of the agreement to be entered in to by the accepted tenderer. Document connected with the contract such as specifications, plans, descriptive specification sheet regarding materials/ brands etc. can be seen at any time during office hours on office days in the office of the DNKM.
4. **Every tenderer's is expected before quoting his rates, to inspect the site of the proposed work.** The best class of materials to be obtained from sources shall be used on the work. In every case the materials must comply with the relevant standard specifications.
5. The tenderer's particular attention is drawn to the sections and clauses in the Standard "Preliminary specifications" dealing with:
 - (1) Test, inspection and rejection of defective materials and work.
 - (2) Carriage.
 - (3) Watering and lighting.
 - (4) Clearing up during progress and for delivery.
 - (5) Accident.
 - (6) Delays.
 - (7) Particulars of payment.
- (8) The contractor should closely peruse all the specification claims which govern the rates which he is tendering.

6. FIRM PERIOD OF QUOTED RATE.

In consideration of the tenderer being allowed to quote for the work, he should keep the tender for a period of 2 months from the date of opening the tender.

7. EXECUTION OF AGREEMENT.

(a) The selected bidder shall within 7 days from the date of receipt of the Work order, deposit a sum sufficient to make up the total 2.5% of the probable value of contract and this shall be treated as security for the proper fulfillment of the contract and shall execute an agreement for the work as directed.

(b) Further time of 7 days shall be allowed to execute an agreement by realizing a fine of 1% of the PAC subject to a minimum of Rs.500/- and maximum of Rs.15000/-

(c) Bidder will be rejected if agreement is not executed within 15 days and the work will be awarded to the next lowest tenderer.

(d) If the successful Bidder fails to execute the agreement after remitting the required security amount within the prescribed period, the EMD shall be forfeited and DNKM shall be at liberty to recover any loss or damage caused by the default of the contractor which results in the re-arrangement of the work. The excess cost that has to be paid to the subsequent contractor due to such re-arrangement will be realized from the assets of defaulted contractor. But the DNKM may in exceptional circumstances limit the penalty to the quantum of EMD based on the orders of the DNKM in genuine observing cases.

(e) The conditions stated herein are binding upon the contractor and shall be constructed as a preliminary agreement between the successful tenderer and the DNKM pending execution of the agreement.

(f) The work awarded bidder should submit a Kerala Stamp paper worth Rs.200/- for signing agreement

(g) The contractor will take over charge within 7 days after executing the agreement and commence the work.

8. The DNKM reserves the right to reject any bidder or all the tenders without assigning any reason therefore.

9. The right to carry out the work either in conformity with or in a manner entirely different from the terms of this invitation that may be considered most suitable before or subsequent to the receipt of tenders due to exigencies of work, is reserved with the DNKM.

10. Any further information necessary can be obtained from the DNKM on all working days during office hours.

11. EXTENSION OF TIME OF COMPLETION

(a) The work should be completed in all respects within the agreement period, **further extension will not be allowed.**

(b) To take care of any delay occurring due to unexpected technical problems faced during execution of the work, time of completion shall be extended by DNKM to complete the work. **If the contractor delays the work further, penalty shall be imposed based on PWD guideline.** The extension of time of completion will not be granted if the extension is necessitated due to the default on the part of the contractor.

12. The contractor is prohibited from removing any department materials from the site/site store without the written permission of the Engineer in charge. Any unauthorized removal of Departmental materials from the site will be taken as a violation of agreement. The contractor or his authorized agent shall verify the register or department materials maintained by the Officers of DNKM at site and attest the entries regarding the receipts, daily issues and balance available at site. The contractor shall also maintain a copy of the same duly attested by the Site Engineer or his authorized representative.

13. Any other materials available in the DNKM stores if issued to the contractor the cost of the same will be recovered at book value or issue rate plus 8% storage and 12 ½ % of supervision charges or market value or data rate whichever is higher.

14. No employee of DNKM, personally or through family members, will in connection with the tender/ quotation for, or the execution of contract, demand, take a promise for or accept, for self or third person, any material or immaterial benefit which the person is not legally entitled to.

15. The contractor will provide his own tools and plant, store sheds to store his own materials as well as those supplied and will be entirely responsible for proper use and safe custody of the latter and also for any loss, damage, theft, mishandling, weathering or any cause whatsoever.

16. The contractor shall be responsible for the safety of the labour employed by him and he shall be liable to pay the necessary compensation in case of accidents as per the workmen's Compensation Act.

17. The contractor shall be liable for all damages caused to public amenities such as electric wires, telephone cables, water mains and private property which should be repaired and restored with least delay.

18. The contractor should make his own arrangement to extricate himself from any legal action instituted against him by other agencies.

19. All sums found due to DNKM by virtue of the present contract or any other contract shall be recoverable first from the security deposit furnished by the contractor and if the sum is found insufficient such deficit amount shall be recoverable in any other manner as the DNKM may deem fit.

20. Time is the essence of the contract. Undue and avoidable delay in the execution of the work will render the contractor liable to penalty.

21. The DNKM reserves the right to terminate the contract at any time in case of poor work, slow progress or violation of rules in other ways.

22. The DNKM reserves the right to abandon the work at any stage if he finds such as a course is necessary and the contractor will be paid only for the finishing items of works.

23. The tenderer on execution of the agreement shall take instruction from the DNKM or the site officers of the Engineering wing, as per tender schedule and agreement.

24. RETENTION

The Security Deposit of the contractor will be released to him after the completion of the Defect Liability period of three months and due fulfillment of the contract agreement and on production of no liability certificate from the Engineer in charge. The contractor shall be permitted to substitute the security deposit by Bank Guarantee after the completion of work and acceptance of measurements of work by contractor on the written instruction of DNKM.

25. The deposits and recoveries from the contractor ie. EMD, Security Deposit, retention, balance payment due to the contractor will not bear interest whatsoever from the employer.

26. The Notice Inviting tender conditions stated herein will form part of the Contract Documents.

27. SETTLEMENT OF DISPUTES

Any dispute or difference that arise between the Engineer-in-charge and the contractor on account of this contract, shall at the instance of either party be Referred to the DNKM whose decision given in writing shall be final conclusive and binding. The DNKM may at his discretion delegate in writing any of his powers, regarding the specifications and execution of work as per the agreement for this work.

29. Special Condition

(i) Work has to be carried out as per the priority fixed by the DNKM and all electrical works should be done through a licensed contractor.

(ii) GST, KCWWF, IT, Centage charge will be levied as per the rules and coming into force during time to time.

(iii) Taxes if any imposed by the Govt/Central Govt. from time to time also will be effect.

30. The undersigned reserves the right to reject any or all tenders without assigning any reasons. Tenders not satisfying the above Terms and conditions are liable to be rejected without any further communication.

Signature of Bidder



SPECIAL CONDITIONS

1. The rates tendered by a bidder for the work shall include the cost of

a) All labour and supervision thereof all materials, tools implements and plants of every description, ladders, cordage, Tackle etc, as well as the provision of safe and substantial scaffolding required for the proper execution of the work in conformity with the specification for the various items of work:

b) Supplying the requisite agency with necessary equipment, to set out the works are well as to afford facilities for such examination of work as the DNKM may, at any time consider desirable, as also to count, weigh and assist in the measurement, or check measurement of the work or materials:

c) Finally clearing away of all rubbish, surplus materials paint etc. on completion of the work and dressing and leveling off and restoring the site to a tidy condition prior to handing over the work to the DNKM or his authorized assistant and also its maintenance until so taken over.

2. The contractor shall be bound to bear the expense of defense of any action or law proceeding that may be brought by person for any injury sustained of any owing to neglect of above precautions in connection with the execution of the work and to pay any damage and cost which may be awarded in consequence.

3. The contractor should have responsibility to make arrangements at site to take measurements / pre-measurements of work executed / to be executed by the concerned Engineer, in specified MEASUREMENT BOOK in time to time.

4. **A hindrance register will be maintained in all site office.** The reason for the actual delay from time to time in completing the work will be assessed and recorded in the register by the site officer. The contractor should satisfy themselves the recording in the register and confirm the same by putting the signature in the register at least once in a week. The entries containing the signature of the contractors alone will be considered for their claims.

5. **Indian standard specifications** shall be followed in case of all the material used, workmanship and other conditions and requirements of the contract.

6. The contractor shall before commencement of the work submit the progress schedule indicating the date of start, monthly progress expected to be achieved and the anticipated completion date of all major item of work to be done by him. In case it is subsequently found necessary to alternate the schedule incorporating necessary modifications the same shall be got approved by competent authority.

7. The DNKM has full power to engage other workmen on the premises to execute fitting or carry out work not include in the contract and the contractor shall afford reasonable facility for the same.


8. No claims will be entertained by the DNKM on account of any increase in railway or road freight cost of all building materials and other materials like petrol, diesel,

lubricate etc. and for may increase in the wages of labour increases in rate of sale tax etc. during the course of construction.

9. Any defect, shrinkage or other fault which may appear with in 12month from the completion of the work shall be made good by the contractor at his own cost unless the Engineer in charge of the work, for reasons to be recorded in writing, decide that they may be paid for.

10. On completion of the work the contractor shall clear away and remove and from the site all construction plant surplus materials, debris and temporary works of every kind and leave the whole of the site and works in a clear condition to the satisfaction of the Engineer-in charge and in the event of the failure of the contractor to comply with those directions, within seven days after receipt by him such clearness may be made by Engineer-in-charge at the expenses of the contractor.

Signature of Bidder

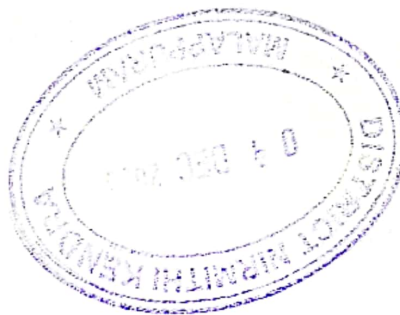

MATERIAL SPECIFICATION CHART

Name of Project	MINOR REPAIR WORKS FOR PRE METRIC HOSTEL AT MANIMOOLI
Tender No	NKMP/TNDR/PRCNT/P1/35/2025

Sl no	Items of Materials	Brand/spec
1	12.5 mm thick tapered edge gypsum plain board conforming to IS : 2095-Part 1	Gyproc saint gobain, India Gypsum Board
2	flush door shutters-Block board, 1st class had wood, teak 3 ply veneering with vertical grains	Duro ply, Century ply, Green ply
3	12 mm thick commercial ply conforming to IS: 1328 BWR type	Duro ply, Century ply, Green ply
4	plywood 4 mm thick, one side decorative veneer conforming to IS : 1328 (type - 1)	Duro ply, Century ply, Green ply
5	plaster of paris putty	Birla white
6	French spirit polish	Skylark
7	Powder coated aluminium (minimum thickness of powder coating 50 micron) extruded built up standard tubular sections/ appropriate Z sections and other sections of approved make conforming to IS : 733 and IS: 1285,	Jindal
8	12 mm thick prelaminated particle board flat pressed three layer or graded wood particle board conforming to IS : 12823 Grade I Type II	Duro ply, Century ply, Green ply
9	float glass panes of 4.0 mm thickness	Saint Gobain
10	Pre-laminated medium density fibre board exterior grade (Grade-I) IS:14587:1998 marked, (one side decorative and other side balancing lamination)	Best wood
11	ISI marked oxidised M.S. single acting spring hinges 100 mm	ISI brands
12	special quality bright finished brass cupboard or wardrobe locks with four levers 40 mm	ISI brands
13	bright finished brass handles 100 mm	ISI brands
14	Cement Primer, acrylic emulsion, plastic emulsion, enamel primer, enamel paint, etc..	Asian / Berger / Dulux.
15	GI rectangular / circular hollow sections	ISI brands / Tata / Jindal/ Appolo/ Bhushan steel.
16	Ms Flats, Angles , Channels	Tata, Appolo, As per pre approval from nirmithi kendra
17	Roof pressed clay tile (Mangalore tile) of 20 mm nominal thickness	1st class

18	8 mm thick (mirror polished and machine cut edge) Granite stone for stone tiling	Good Quality
19	PVC Pipes	Supreme
20	CEMENT	ACC, Chettinad, Bharathi, Ramco, JSW, Sankar, Malabar.
21	M.sand (Coarse, fine), 20 mm metal, 40 mm metal	As per pre approval from nirmithi kendra
22	Synthetic Primer, enamel paint, etc..	Asian / Berger / Dulux.

All Materials can be purchased only with the prior permission of the Nirmithi Kendra

Name :

Project manager cum Exe.secretary

Address of firm :

District Nirmithi Kendra, Malappuram.

Signature :

Signature :

[Handwritten Signature]
04.12.25
Project Manager Cum
Executive Secretary
District Nirmithi Kendra
Civil Station, Malappuram

