



DISTRICT NIRMITHI KENDRA, CIVIL STATION, MALAPPURAM.


Ph : 0483- 2735594

INVITATION OF TENDER-PERCENTAGE ITEM RATE CONTRACT

TENDER NO	DNKM/LP/50/2025-A1/ELE	06.05.2026
PROJECT NAME	ELECTRIFICATION OF BUILDING FOR VALAVANNUR SMART VILLAGE OFFICE IN TIRUR TALUK	
LOCATION	TIRUR	
SCOPE OF WORK	ELECTRIFICATION	
Sealed tenders are invited from from competent bidders , meeting prescribed qualifying criteria as mentioned in tender document/Schedule .Tender form and Tender schedule can be downloaded from Malappuram District Administration website www.malappuram.nic.in and District Nirmithi Kendra Website www.nirmithikendramlp.com to understand the scope of work & condition of tender document. DNKM reserves the right to issue any corrigendum to the tender even upto five days prior to the due date of opening of the tender. Bidders are also advised to check the website for the purpose of submitting their bids or revising their bids, whether any such corrigendum to the tender has been issued or not.		
Tender form and Tender schedule may be received from the office of the District Nirmithi Kendra. Tenders should have addressed to , Project Manager cum Exe.secretary, District Nirmithi Kendra, Civil Station, Malappuram, 676505, phone : 0483-2735594. Tenders are accepted through registered post/Courier/by hand. Late tenders will not be accepted. Tenders will be opened in the presence of Tenderer or their authorized representatives who may be present on that time. If the Tender opening date happens to be a declared holiday, the process will be done on the next working day at same time and place. Further details can be had from the office of District Nirmithi Kendra, Civil Station, Malappuram during working hours.		
1	Last Date & Time of Submission of Bids	: 13/05/2026, 4.00 PM
2	Date & Time of Opening of Bids	: 14/05/2026, 11:30 AM
3	Tender Value	: Rs. 3,40,000 + 18% GST
4	Class of Contractor	: Valid PWD ELECTRICAL INSPECTRATE CONTRACTOR LICENCE(A/B/C) & GST REGISTRATION
5	Bid validity	: 60 days

Name :
Address of firm :

Signature :

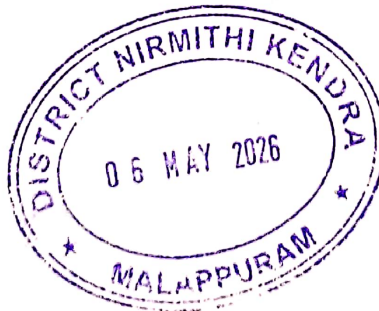

Project manager cum Exe.secretary
District Nirmithi Kendra, Malappuram.

Signature :

06/05/2026
Project Manager Cum
Executive Secretary
District Nirmithi Kendra
Civil Station, Malappuram

Tender invitation



INSTRUCTIONS TO BIDDERS

Tender No	:	DNKMMLP/50/2025-A1/ELE	Date: 06.05.2026
PROJECT NAME	:	ELECTRIFICATION OF BUILDING FOR VALAVANNUR SMART VILLAGE OFFICE IN TIRUR TALUK	


- 1 The cover containing the tender should be superscribed as " Tender for " ELECTRIFICATION OF BUILDING FOR VALAVANNUR SMART VILLAGE OFFICE IN TIRUR TALUK ".
- 2 The Bidder Should have Valid PWD Electrical Inspectrate Contractor Licence and GST Registration.
- 3 The unit rate, make/ specification, quality, if any for each item has been specified in the enclosed format.
- 4 The bidder shall submit the details in the prescribed format duly signed on each & every page of the quote
- 5 The work should be completed within 75 days from the date of receipt of work order.
- 6 This approved rate will remain valid for 2 months from the date of award of work
- 7 Work should be carried out with at most care and quality as directed by the site in charge and should be completed with in the proposed completion period.
- 8 The price of each article shall remain constant and increase in price will not be allowed during contract period.
- 9 The Supplied items should be of original make and PWD approved only.
- 10 The rate quoted should be inclusive of duties, freight, loading, unloading, etc and Excluding of 18% GST
- 11 The Part Payment will be released after 80% completion of the work & remaining 20% will be realeased after completion of the work
- 12 If the quality of items is found bad, the items should be replaced with similar quality as immediately.
- 13 No employee of DNKM, personally or through family members, will in connection with the tender/Quotation for, or the execution of a contract, demand, take a promise for or accept, for self or third person, any material or immaterial benefit which the person is not legally entitled to.
- 14 The undersigned reserves the right to reject any or all tenders without assigning any reasons.Tenders not satisfying the Terms and conditions are liable to be rejected without any further communication.
- 15 For clarification on make/quality etc. of item, the bidder may contact with the office during the working days (Monday to Saturday)between 10.00 am to 5.00 pm.

Name :
Address of firm :

Project manager cum Exe.secretary
District Nirmithi Kendra, Malappuram.

Signature :

Signature :

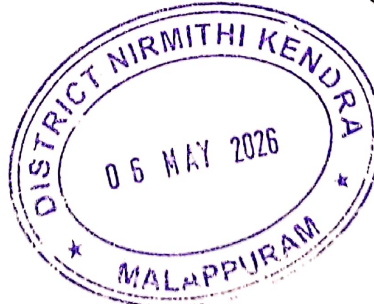

06/05/26
Project Manager Cum
Executive Secretary
District Nirmithi Kendra
Civil Station, Malappuram


Tender Invitation




TENDER SCHEDULE					
(TENDER FORMAT FOR QUOTING ITEM RATE CONTRACT)					
				Date : 06 May 2026	
Tender No :		DNKMMLP/50/2025-A1/ELE			
Project Name :		ELECTRIFICATION OF BUILDING FOR VALAVANNUR SMART VILLAGE OFFICE IN TIRUR TALUK			
		DSOR: 2022 Cost Index:20.62 %			
Sl.No	Qty	Unit	Particulars	Rate	TOTAL Amount
1	WIRING POINTS				
1.001	46.00	point	1.10.1 Wiring for light point/ fan point/ exhaust fan point/ call bell point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable in surface / recessed medium class PVC conduit, with modular switch, modular plate, suitable GI box and earthing the point with 1.5 sq.mm. FRLS PVC insulated copper conductor single core cable etc as required. Group A	1003.93	46180.78
1.002	41.00	each	1.33 Supplying and fixing 3 pin, 5 amp ceiling rose on the existing junction box/ wooden block including connection etc as required.	85.70	3513.70
1.003	50.00	metre	1.17.21 Supplying and drawing following sizes of FRLS PVC insulated copper conductor, single core cable in the existing surface / recessed steel/ PVC conduit as required. 3 x 4 sq. mm	203.58	10179.00
1.004	80.00	metre	1.17.12 Supplying and drawing following sizes of FRLS PVC insulated copper conductor, single core cable in the existing surface / recessed steel/ PVC conduit as required. 3 x 2.5 sq. mm	135.71	10856.80
1.005	450.00	metre	1.17.3 Supplying and drawing following sizes of FRLS PVC insulated copper conductor, single core cable in the existing surface / recessed steel/ PVC conduit as required. 3 X 1.5 sq.mm	94.05	42322.50




1.006	370.00	metre	1.21.1 Supplying and fixing of following sizes of medium class PVC conduit along with accessories in surface/ recess including cutting the wall and making good the same in case of recessed conduit as required. 20 mm	126.87	46941.90
1.007	20.00	metre	1.21.2 Supplying and fixing of following sizes of medium class PVC conduit along with accessories in surface/ recess including cutting the wall and making good the same in case of recessed conduit as required. 25 mm	143.02	2860.40
1.008	24.00	each	1.24.1 Supplying and fixing following modular switch/ socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required. 5/6 amps switch	101.67	2440.08
1.009	3.00	each	1.24.3 Supplying and fixing following modular switch/ socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required. 15/16 amp switch	154.06	462.18
1.01	32.00	each	1.24.4 Supplying and fixing following modular switch/ socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required. 3 pin 5/6 amp socket outlet	120.61	3859.52
1.011	8.00	each	1.24.5 Supplying and fixing following modular switch/ socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required. 6 pin 15/16 amp socket outlet	194.66	1557.28
1.012	3.00	each	90.10.3.15 Supply and Fixing the following modular switches & accessories in the existing front plates and giving necessary connections as required (RoHS compliant) 32A DP switch with indicator	530.37	1591.11

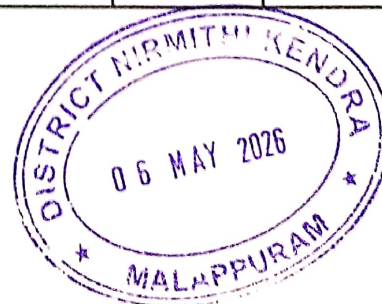


1.013	13.00	each	1.27.1 Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc as required. 1 or 2 Module (75mmX75mm)	294.89	3833.57
1.014	1.00	each	90.10.1.2 Supply & Fixing the following types/ sizes of boxes suitable for modular accessories in surface/ recess including making good the damages, colour washing etc as required (RoHS compliant) 2 module moulded plastic box on surface	236.90	236.90
1.015	1.00	each	90.10.1.6 Supply & Fixing the following types/ sizes of boxes suitable for modular accessories in surface/ recess including making good the damages, colour washing etc as required (RoHS compliant) 8 module moulded plastic box on surface	320.68	320.68
1.016	1.00	each	1.28.1 Supplying and fixing following Modular base & cover plate on existing modular metal boxes etc. as required. 1 or 2 Module	131.20	131.20
1.017	1.00	each	1.28.5 Supplying and fixing following Modular base & cover plate on existing modular metal boxes etc. as required. 8 Module	208.47	208.47
1.018	7.00	each	1.27.2 Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc as required. 3 Module (100mmX75mm)	323.70	2265.90
1.019	1.00	each	1.27.3 Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc as required. 4 Module (125mmX75mm)	339.41	339.41
1.02	2.00	each	1.27.4 Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc as required. 6 Module (200mmX75mm)	397.04	794.08

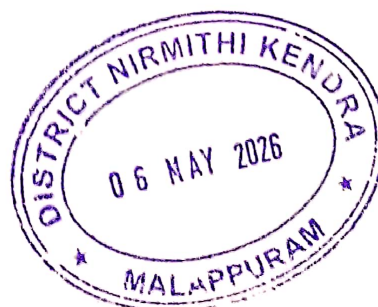


1.021	8.00	each	1.27.5 Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc as required. 8 Module (125mmX125mm)	449.16	3593.28
1.022	5.00	each	1.58 Supplying and fixing PVC batten/ angle holder including connection etc. as required.	108.55	542.75
1.023	3.00	each	1.56 Supplying and fixing suitable size GI box with modular plate and cover in front on surface or in recess, including providng and fixing 2 Nos. 3 pin 5/6 A modular socket outlets and 2 Nos. 5/6 A modular switches, connection etc. as required. (For light plugs to be used in non residential buildings)	672.02	2016.06
2	FITTINGS				
2.001	2.00	each	90.15.4.2 Supply Conveyance, installation, testing and commissioning of 36/40W LED street light output greater than 105lumen/W 4000- 6000 K with IP 66 protection LED Chip make Cree/Lumilled/Nichea with power factor greater than 0.95 at full load, internal surge protection up to 8 KV, and Aluminium pressure die-cast Powder coated housing, acrylic cover complete with THD less than 10%, power factor greater than 0.98, RoHS compliant, duly wired up for use on 230 V AC supply. Driver compartment should be seperatly accessible for maintenance (LM 79&80 certificates from NABL accredited Third party lab to be produced mentioning chip manufacturer)	4336.08	8672.16
2.002	2.00	metre	90.3.18.2 Supply, fabrication, conveyance and fixing the following sizes of B class GI pipe bent to shape / cut and welded to shape and fixing the same to wall / parapet using clamps as noted along with each size, painting with 2 coats of synthetic enamel paint over a coat of zinc chromate primer, making good the damages, colour washing etc as required. 32 mm dia with HG company fabricated clamps	619.67	1239.34

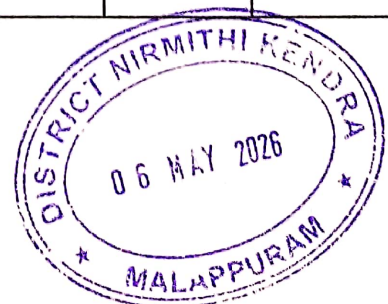


2.003	20.00	each	90.3.19.3 Supply conveyance, installation, testing and commissioning the light fittings of following types made from CRCA sheet 0.5mm thickness with all accessories and lamps directly on wall and giving connections with 16/0.20 mm 3 core PVC insulated and sheathed round copper conductor flex wire or extending the original wiring and giving connections as required 1200 mm 1X20W LED Lamp with box type fixture	1152.08	23041.60
2.004	12.00	each	19.1 Supply, installation, testing and commissioning of 1200 mm sweep BEE-5 star rated ceiling fan with brushless direct current motor (BLDC) , class of insulation B , 3 no:s blades , 30 cm long down rod , 2no:s canopies, shackle kit, safety rope , copper winding, power factor not less than .9, service value (CM/M/W) minimum 6.00, Air delivery minimum 210 cum/min,350 RPM (tolerance as per IS :374-2019, THD less than 10% remote or electronic regulator unit for speed control and all remaining accesories including safety pin, nut and bolts , washers, temperature rise equal to 75 deg celsius (maximum) , insulation resistance more than 2 Megaohm , suitable for 230V,50 Hz, single phase AC supply , earthing etc., complete as required:	2488.31	29859.72
2.005	4.00	each	OD411926/2025-2026 Supply and fixing bulk head fittings suitable for 9W LED to wall / ceiling including giving connections with required length of 6/0.20mm PVC insulated and PVC sheathed 3 core round copper conductor flex wire conforming to relevant ISS or extending the original wiring and making good the srface asrequired	705.74	2822.96
2.006	3.00	each	OD411927/2025-2026 Supply,conveyance,installation,testing and commissioning of 225 mm sweep Light Duty Exhaust fan in metal frame working on 230V AC	1705.14	5115.42
2.007	5.00	each	OD411928/2025-2026 Supply and providing the following types and power rated lamps in the existing Angle holder/fittings as required 8W LED BULB	156.35	781.75

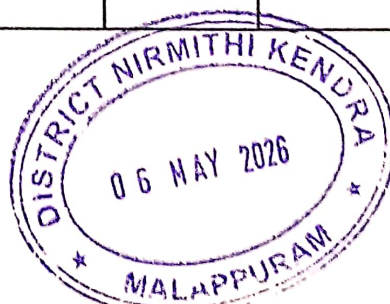


2.008	12.00	each	90.4.1 Supply and installation of suitable size MS rod type fan clamp in the RCC slab as per IS 732 as required.	168.07	2016.84
2.009	3.00	each	90.4.8 Charges for cutting holes suitable for accommodating exhaust fans up to 305mm sweep including plastering colour washing etc. as required.	460.79	1382.37
3 DB & ACCESSORIES					
3.001	30	each	2.10.1 Supplying and fixing 5A to 32 A rating, 240/415 volts, 10 kA, "C" curve, miniature circuit breaker suitable for inductive load of following poles in the existing MCB DB complete with connections, testing and commissioning etc. as required. Single pole	252.99	7589.70
3.002	2	each	2.11 Supplying and fixing single pole blanking plate in the existing MCB DB complete etc. as required.	12.39	24.78
3.003	1.00	each	2.13.1 Supplying and fixing following rating, four pole, 415 volts, isolator in the existing MCB DB complete with connections, testing and commissioning etc. as required. 40 amps	959.12	959.12
3.004	1.00	each	2.15.2 Supplying and fixing following rating, four pole, (three phase and neutral), 415 volts, residual current circuit breaker (RCCB), having a sensitivity current 30 milli Amperes in the existing MCB DB complete with connections, testing and commissioning etc. as required. 40 amps	3151.44	3151.44
3.005	1.00	each	90.11.1.11 Supply and installation of sheet steel, phosphatised and painted, dust and vermin proof enclosure of MCB DB including copper /brass bus bar, neutral link, earth bus and DIN rail suitable for fixing MCB/ isolator etc. fixed on wall using suitable anchor bolts or fixed in recess including cutting hole on the wall , making good the damages, colour washing etc. as required 6 way (8+18) - three phase double cover (IP 42/43)	4243.02	4243.02

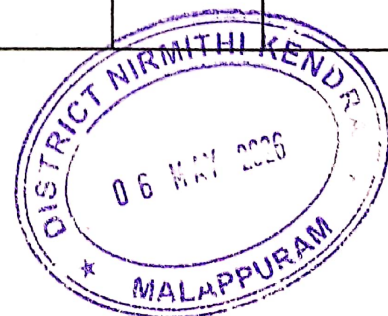

3.006	1.00	each	2.12.1 Supplying and fixing following rating, double pole, 240 volts, isolator in the existing MCB DB complete with connections, testing and commissioning etc. as required. 40 amps	429.79	429.79
3.007	1.00	each	2.14.2 Supplying and fixing following rating, double pole, (single phase and neutral), 240 volts, residual current circuit breaker (RCCB), having a sensitivity current 30 milli amperes in the existing MCB DB complete with connections, testing and commissioning etc. as required. 40 amps	2612.35	2612.35
3.008	1.00	each	2.3.4 Supplying and fixing following way, single pole and neutral, sheet steel, MCB distribution board, 240 volts, on surface/ recess, complete with tinned copper bus bar, neutral bus bar, earth bar, din bar, interconnections, powder painted including earthing etc. as required. (But without MCB/RCCB/Isolator) 16 way, Double door	3105.58	3105.58
4	CABLING & EARTHING				
4.001	20.00	metre	90.12.7.41 Supply, laying and clamping of 1 no. PVC insulated and PVC sheathed armoured aluminium power cable, 1.1 KV grade of the following sizes using clamps noted along with the cables, spacing of clamps not exceeding 60cms, making good the damages, colour washing etc. as required. 4 core 16 sq mm with factory made clamp	266.25	5325.00
4.002	40.00	metre	90.16.1.2 Supply and drawing bare earthing conductors of the following sizes along with wiring/ cables and giving connection as required 2.65 mm copper conductor (12 SWG)	42.67	1706.80

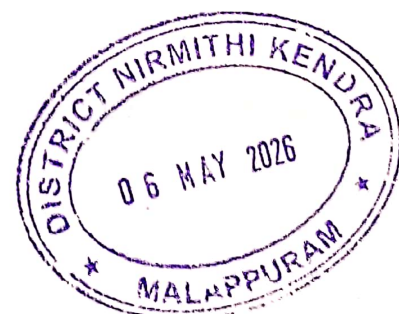

4.003	2.00	set	9.1.33 Supplying and making end termination with brass compression gland and aluminium lugs for following size of PVC insulated and PVC sheathed / XLPE aluminium conductor cable of 1.1 KV grade as required. 4 X 16 sq. mm (28mm)	305.40	610.80
4.004	8.00	each	90.16.5.2 Supply of superior quality copper earth socket for the following size of earth conductor including crimping etc. as required. 2.65 mm (12 SWG)	24.57	196.56
4.005	2.00	set	OD413163/2025-2026 Earthing with G.I. earth pipe 2.5 metre long, 40 mm dia including accessories, and providing masonry enclosure with cover plate having locking arrangement and watering pipe etc. (with charcoal/ coke and salt) as required	5772.87	11545.74
5	NETWORK				
5.001	100.00	metre	1.53.1 Supplying and drawn of UTP 4 pair CAT 6 LAN cable in the existing surface/recessed steel/PVC conduit as required 1 run of Cable	56.82	5682.00
5.002	1.00	each	OD413185/2025-2026 Supply & installation of 8 port Network Switch GIGA D Link	2558.31	2558.31
5.003	8.00	each	OD413186/2025-2026 Supply and fixing D-link Keystone jack with face plate and back box	509.08	4072.64
5.004	8.00	each	OD413187/2025-2026 Supplying and drawn of 1.5 meter patch cable	162.86	1302.88
5.005	1.00	each	OD413188/2025-2026 Supply and fixing Net work Rack (4U) wall mounting type fitted with anchor bolts with all connection etc complete	1927.68	1927.68
5.006	8.00	each	OD413189/2025-2026 Supply Crimping D-Link RJ 45 Cable Connector	21.31	170.48
5.007	50.00	metre	90.6.9.2 Supplying & Drawing unarmored PVC insulated and & PVC sheathed copper conductor Telephone Pair Cable conforming to ITD specification for indoor application through the existing conduit 2 pair	44.32	2216.00
6	METER BOX & KSEB CHARGES				

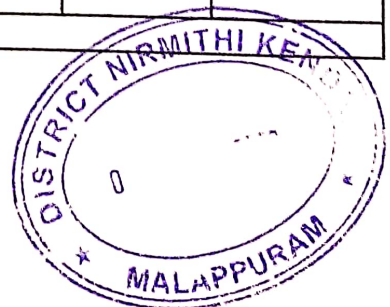

6.001	1.00	each	OD411933/2025-2026 kseb paper charge & online application 3-phase connection	1612.50	1612.50
6.002	1.00	each	OD411932/2025-2026 Supply and installation of dust and vermin proof 3 Phase Syntex Meter Board double compartment and to fix KSEB Meters including all fuse units , 63A SFU & all other accessories, fixing on wall making good the damages colour washing etc as required as per direction from Engineer in Charge	11195.52	11195.52
6.003	1.00	each	OD411931/2025-2026 Charges for Three Phase Connection (The amount as per demand note from concerned KSEB Section office)	5375.00	5375.00
			Total Amount		339593.40
			Roundoff amount		406.60
			Roundoff amount		340000.00
			(Rupees Seventy Three Lakh Fourty Thousand Only)		

Quote in Below Rate

..... % Below of 3,40,000/-

Quoted rate in Rs :

In words : Rupees

NOTE : Also KCWWF, TDS, and other Statutory Taxes are applicable/levied as per the norms of Tax Department.

Name


Address of firm :

Signature

Project manager cum Exe.sec

District Nirmithi Kendra, mlpm

Signature

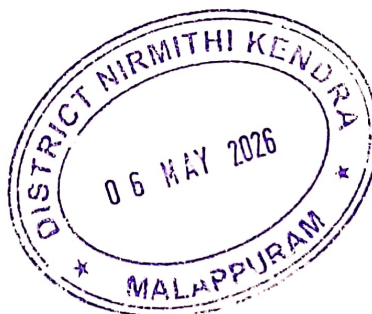

Project Manager Cum
Executive Secretary
District Nirmithi Kendra
Civil Station, Malappuram

MATERIAL SPECIFICATION CHART

Name of Project		ELECTRIFICATION OF BUILDING FOR VALAVANNUR SMART VILLAGE OFFICE IN TIRUR TALUK
Sl no	Items of Materials	Brand / spec
1	PVC conduit and accessories / casing and capping - ISI Medium	Precision, Balco, Konseal, Lappkabel, Clipsal, Polycab, Anchor, Geo, Finolex
2	660/1100 volt grade stranded unsheathed wire with copper conductor (FRLS)	Finolex, RR Kabel, Polycab, V-guard, KEI, Traco, Havells, ATC, Gloster
3	1.1 kV grade XLPE insulated PVC sheathed Al./Cu. Cable	KEI, Polycab, Havells, Gloster, Finolex, Torrent, VGuard, ATC,
4	Modular type switches, sockets, bell push, fan regulator etc. Medium range	Ellays, Legrand (Myrius), Kolors (krest), Anchor, GM
5	Ceiling rose / Bulb holder	Anchor, GM
6	MCB/ RCCB/ MCCB/ DB accessories	L&T, Legrand, Siemens, Hager, Schneider, ABB, Polycab, Indoasian
7	Distribution Board IP43 - (MCB type)	L&T, Legrand, Siemens, Hager, Schneider, ABB, Polycab, Indoasian, Vguard
8	Ceiling fans / Wall fans	Usha, Crompton, Oreint, Khaitan, Kulirma, Polycab, bajaj
9	Exhaust fans	Almonard, Crompton, Khaitan, Bajaj, Havells, Polycab, Havells
10	SDF / SDFU	L&T, Siemens, Schneider, ABB, Indoasian
11	LED Light Fittings	Philips, Osram, Havells, Bajaj, Crompton, Luker

All Materials can be purchased only with the prior permission of the Nirmithi Kendra

Name :


Project manager cum Exe.secretary


Address of firm :

District Nirmithi Kendra, Malappuram.

Signature :

Signature :

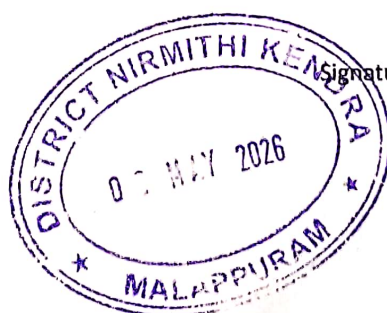


 06/05/26
 Project Manager Cum
 Executive Secretary
 District Nirmithi Kendra
 Civil Station, Malappuram

DISTRICT NIRMITHI KENDRA, CIVIL STATION, MALAPPURAM.
GENERAL CONDITIONS

1. The Bidder should quote all the items of prescribed schedule; partially quoted tenders will be rejected.
2. All works shall be done in conformity with the specifications and conditions of contract in force in the District Nirmithi Kendra, Malappuram. The rate should be quoted in the attached schedule, **KCWWF, TDS (GST, IT) and other taxes are applicable / levied** from the each running bill.
3. The Bidder shall examine closely carefully study the drawings and additional specifications and all the documents, which form part of the agreement to be entered in to by the accepted tenderer. Document connected with the contract such as specifications, plans, descriptive specification sheet regarding materials/ brands etc. can be seen at any time during office hours on office days in the office of the DNKM.
4. **Every tenderer's is expected before quoting his rates, to inspect the site of the proposed work.** The best class of materials to be obtained from sources shall be used on the work. In every case the materials must comply with the relevant standard specifications. Sample of materials are called for in the standard specifications, or in this tender notice, or as required by officials of DNKM in any case, shall submitted to the same for approval before the supply to site for work is begun. If the contractor after examination of the source of material defined in the descriptive Specification sheet is of opinion that material complying the standard or other specifications of the contract cannot be obtained I st quality or sufficient quality from the source in descriptive specification sheet, he shall so state clearly in his tender and state where from it intends to obtain the materials subject to the approval of the Project manager cum Exe-secretary. **The DNKM will not, however, after acceptance of a contract, rates, pay any extra charges for lead or for any other reasons, in case the contractor is found later on to have misjudged the material available.**
5. The tenderer's particular attention is drawn to the sections and clauses in the Standard "Preliminary specifications" dealing with:
 - (1) Test, inspection and rejection of defective materials and work.
 - (2) Carriage.
 - (3) Watering and lighting.
 - (4) Clearing up during progress and for delivery.
 - (5) Accident.
 - (6) Delays.
 - (7) Particulars of payment.
 - (8) The contractor should closely peruse all the specification claims which govern the rates which he is tendering.

6. FIRM PERIOD OF QUOTED RATE.

In consideration of the tenderer being allowed to quote for the work, he should keep the tender for a period of **2 months** from the date of opening the tender. Any withdrawal of tender within the firm period will entail forfeiture of the earnest money deposited for the work, without any further notice. If due to administrative or other reasons it is found necessary to keep the tender open for a further period, prior consent of the tenderer shall be obtained in writing for every further period of 30 days.

7. EXECUTION OF AGREEMENT.

- (a) The selected bidder shall execute an agreement for the work as directed within **7 days** from the date of receipt of the Work order for the proper fulfillment of the contract.
- (b) Further time of 7days shall be allowed to execute an agreement by realizing a fine of 1% of the PAC subject to a minimum of Rs.500/- and maximum of Rs.15000/-
- (c) Bidder will be rejected if agreement is not executed within **15days** and the work will be awarded to the next lowest tenderer.
- (d) The conditions stated herein are binding upon the contractor and shall be constructed as a preliminary agreement between the successful tenderer and the DNKM pending execution of the agreement.
- (e) The work awarded bidder should submit a Korala Stamp paper worth Rs.200/- for signing agreement
- (f) The contractor will **take over charge within 7 days** after executing the agreement and commence the work.
8. The DNKM reserves the right to reject any bidder or all the tenders without assigning any reason therefore.
9. The right to carry out the work either in conformity with or in a manner entirely different from the terms of this invitation that may be considered most suitable before or subsequent to the receipt of tenders due to exigencies of work, is reserved with the DNKM.

10. Any further information necessary can be obtained from the DNKM on all working days during office hours.

11. EXTENTION OF TIME OF COMPLETION

(a) The work should be completed in all respects within the agreement period, **further extension will not be allowed.**
 (b) To take care of any delay occurring due to unexpected technical problems faced during execution of the work, time of completion shall be extended by DNKM to complete the work. **If the contractor delays the work further, penalty shall be imposed based on PWD guideline.** The extension of time of completion will not be granted if the extension is necessitated due to the default on the part of the contractor.

12. The contractor is prohibited from removing any department materials from the site/ site store without the written permission of the Engineer in charge. Any unauthorized removal of Departmental materials from the site will be taken as a violation of agreement. The contractor or his authorized agent shall verify the register or department materials maintained by the Officers of DNKM at site and attest the entries regarding the receipts, daily issues and balance available at site. The contractor shall also maintain a copy of the same duly attested by the Site Engineer or his authorized representative.

13. Any other materials available in the DNKM stores if issued to the contractor the cost of the same will be recovered at book value or issue rate plus 8% storage and 12 ½ % of supervision charges or market value or data rate whichever is higher.

14. No employee of DNKM, personally or through family members, will in connection with the tender/ quotation for, or the execution of contract, demand, take a promise for or accept, for self or third person, any material or immaterial benefit which the person is not legally entitled to.

15. The contractor will provide his own tools and plant, store sheds to store his own materials as well as those supplied and will be entirely responsible for proper use and safe custody of the latter and also for any loss, damage, theft, mishandling, weathering or any cause whatsoever.

16. The contractor shall be responsible for the safety of the labour employed by him and he shall be liable to pay the necessary compensation in case of accidents as per the workmen's Compensation Act.

17. The contractor shall be liable for all damages caused to public amenities such as electric wires, telephone cables, water mains and private property which should be repaired and restored with least delay.

18. The contractor should make his own arrangement to extricate himself from any legal action instituted against him by other agencies.

19. **All sums found due to DNKM by virtue of the present contract or any other contract shall be recoverable first from the security deposit furnished by the contractor and if the sum is found insufficient such deficit amount shall be recoverable in any other manner as the DNKM may deem fit.**

20. Time is the essence of the contract. Undue and avoidable delay in the execution of the work will render the contractor liable to penalty.

21. The DNKM reserves the right to terminate the contract at any time in case of poor work, slow progress or violation of rules in other ways.

22. The DNKM reserves the right to abandon the work at any stage if he finds such as a course is necessary and the contractor will be paid only for the finishing items of works.

23. The tenderer on execution of the agreement shall take instruction from the DNKM or the site officers of the Engineering wing, as per tender schedule and agreement.

25. The deposits and recoveries from the contractor ie. Security Deposit, retention, balance payment due to the contractor will not bear interest whatsoever from the employer.

26. The Notice Inviting tender conditions stated herein will form part of the contract Documents.

27. SETTLEMENT OF DISPUTES

Any dispute or difference that arise between the Engineer-in-charge and the contractor on account of this contract, shall at the instance of either party be referred to the DNKM whose decision given in writing shall be final conclusive and binding. The DNKM may at his discretion delegate in writing any of his powers, regarding the specifications and execution of work as per the agreement for this work.

29. Special Condition

(i) PWD Approved Material List should be used for the entire work.


(ii) The Bidder shall quote the work without GST.

(iii) Work has to be carried out as per the priority fixed by the DNKM.

(iv) KCWWF, IT, will be levied as per the rules and coming into force during time to time.

(v) Taxes if any imposed by the Govt/Central Govt. from time to time also will be effect.


Signature of Bidder

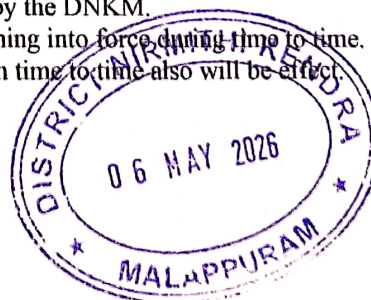


SPECIAL CONDITIONS

1. The rates tendered by a bidder for the work shall include the cost of
 - a) All labour and supervision thereof all materials, tools implements and plants of every description, ladders, cordage, Tackle etc, as well as the provision of safe and substantial scaffolding required for the proper execution of the work in conformity with the specification for the various items of work;
 - b) Supplying the requisite agency with necessary equipment, to set out the works are well as to afford facilities for such examination of work as the DNKM may, at any time consider desirable, as also to count, weigh and assist in the measurement, or check measurement of the work or materials;
 - c) Finally clearing away of all rubbish, surplus materials paint etc. on completion of the work and dressing and leveling off and restoring the site to a tidy condition prior to handing over the work to the DNKM or his authorized assistant and also its maintenance until so taken over.
2. The contractor shall be bound to bear the expense of defense of any action or law proceeding that may be brought by person for any injury sustained of any owing to neglect of above precautions in connection with the execution of the work and to pay any damage and cost which may be awarded in consequence.
3. The contractor should have responsibility to make arrangements at site to take measurements / pre-measurements of work executed / to be executed by the concerned Engineer, in specified MEASUREMENT BOOK in time to time.
4. **A hindrance register will be maintained in all site office.** The reason for the actual delay from time to time in completing the work will be assessed and recorded in the register by the site officer. The contractor should satisfy themselves the recording in the register and confirm the same by putting the signature in the register at least once in a week. The entries containing the signature of the contractors alone will be considered for their claims.
5. **Indian standard specifications** shall be followed in case of all the material used, workmanship and other conditions and requirements of the contract.
6. The contractor shall before commencement of the work submit the progress schedule indicating the date of start, monthly progress expected to be achieved and the anticipated completion date of all major item of work to be done by him. In case it is subsequently find necessary to alternate the schedule incorporating necessary modifications the same shall be got approved by competent authority.
7. The DNKM has full power to engage other workmen on the premises to execute fitting or carry out work not include in the contract and the contractor shall afford reasonable facility for the same.
8. No claims will be entertained by the DNKM on account of any increase in railway or road freight cost of all building materials and other materials like petrol, diesel, lubricate etc. and for may increase in the wages of labour increases in rate of sale tax etc. during the course of construction.
9. Any defect, shrinkage or other fault which may appear with in 12month from the completion of the work shall be made good by the contractor at his own cost unless the Engineer in charge of the work, for reasons to be recorded in writing, decide that they may be paid for.
10. On completion of the work the contractor shall clear away and remove and from the site all construction plant surplus materials, debris and temporary works of every kind and leave the whole of the site and works in a clear condition to the satisfaction of the Engineer-in charge and in the event of the failure of the contractor to comply with those directions, within seven days after receipt by him such clearness may be made by Engineer-in-charge at the expenses of the contractor.
11. The bidders who are already supplying materials/executing projects of DNKM should enclose a performance report from concerned authority of DNKM. (The performance report format is available at the office of DNKM. New bidders have to submit any of their previous work details (Net amount more than 10 Lakhs)
12. DNKM shall only pay net PAC amount or total bill amount, whichever is less. In case excess qty executed by contractor, the balance amount released only after getting approval from the concerned authority.

Signature of Bidder

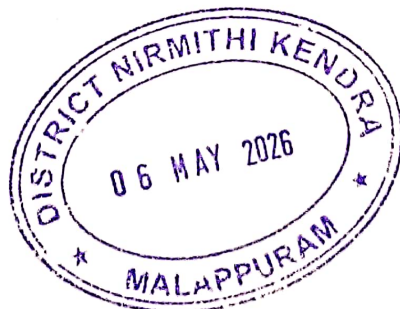


 Project Manager Cum
 Executive Secretary
 District Nirmithi Kendra
 Civil Station, Malappuram